

深圳市方磁電子有限公司

SHENZHEN FOUNDS ELECTRONICS CO., LTD

【物料承認書】

APPROVAL SHEET

客戶 (Customer) : _____

產品名稱 (Description) : 功率電感

客戶料號 (Cus P/N) : _____

料號 (Part NO) : F5NR6028系列

日期 (Date) : 2019-05-15

版本 (Version) : A1.0

核准 APPROVED BY	審核 CHECKED BY	製作 DRAWN BY
TopoCheng	VincentShang	AbbyShi

Please sign back after confirmation:

Client signature: Qualified Unqualified

批准 APPROVAL	審核 CHECKED	檢驗 CONFORM

地址 (Address) : 深圳市寶安區新安街道裕安二路 131 號

C33 科創園 2 棟 209 室

電話 (TEL) : 0755-83222650

傳真 (FAX) : 0755-83222656


<http://www.ele-founds.com>



【Version of Changed Record】

Rev.	Effective Date	Changed Contents	Change Reasons	Approved By
A1.0	2019.05.15	New release	/	TopoCheng

1. Shape and Dimension (Unit:mm)

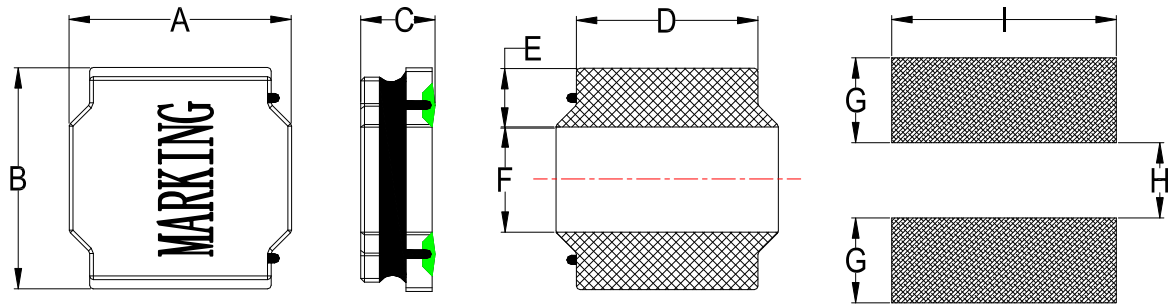

A	B	C	D	E	F	G	H	I
6.0 ± 0.3	6.0 ± 0.3	2.8Max	4.9±0.3	1.55±0.3	2.9±0.3	1.7Ref	2.8 Ref	5.7 Ref

2. Electronic Characteristics List

Part Number	Inductance (uH)	Tolerance (±%)	DCR (mΩ) ±30%	Isat (A)	Irise (A)	Test Condition	Marking
FSNR6028-1R0N	1.0	30	12	6.70	4.60	100KHz /0.25V	1R0
FSNR6028-1R2N	1.2	30	16	6.50	4.30	100KHz /0.25V	1R2
FSNR6028-1R5N	1.5	30	16	6.00	4.30	100KHz /0.25V	1R5
FSNR6028-1R8N	1.8	30	19	5.30	4.10	100KHz /0.25V	1R8
FSNR6028-2R2N	2.2	30	20	5.10	3.75	100KHz /0.25V	2R2
FSNR6028-3R3N	3.3	30	25	3.63	3.40	100KHz /0.25V	3R3
FSNR6028-4R7M	4.7	20	33	3.00	3.00	100KHz /0.25V	4R7
FSNR6028-5R6N	5.6	30	45	2.80	2.45	100KHz /0.25V	5R6
FSNR6028-6R8M	6.8	20	56	2.60	2.40	100KHz /0.25V	6R8
FSNR6028-8R2M	8.2	20	68	2.40	2.25	100KHz /0.25V	8R2
FSNR6028-100M	10	20	78	2.05	1.90	100KHz /0.25V	100
FSNR6028-120M	12	20	88	1.80	1.70	100KHz /0.25V	120
FSNR6028-150M	15	20	125	1.75	1.50	100KHz /0.25V	150
FSNR6028-180M	18	20	130	1.55	1.45	100KHz /0.25V	180
FSNR6028-220M	22	20	140	1.45	1.40	100KHz /0.25V	220
FSNR6028-270M	27	20	180	1.40	1.30	100KHz /0.25V	270
FSNR6028-330M	33	20	220	1.35	1.10	100KHz /0.25V	330
FSNR6028-390M	39	20	225	1.25	1.10	100KHz /0.25V	390
FSNR6028-470M	47	20	280	1.15	1.05	100KHz /0.25V	470
FSNR6028-680M	68	20	420	0.95	0.85	100KHz /0.25V	680
FSNR6028-820M	82	20	550	0.80	0.70	100KHz /0.25V	820
FSNR6028-101M	100	20	670	0.65	0.60	100KHz /0.25V	101
FSNR6028-121M	120	20	820	0.62	0.58	100KHz /0.25V	121

Isat :

DC Saturation Current that will cause initial inductance to drop approximately 30% max.

Irise :

DC Current that will cause an approximate ΔT of 40 °C

Measuring Instrument :

L:HIOKI3532-50

DCR:HIOKI 3540

Isat / Irise: HP4284+42841A


3. General Characteristics

3-1. Storage Temperature range : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3-2. Operating temperature range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (Including coil's self temperature rise)


3-3. External appearance : No external defects can be found in the visual inspection.

3-4. Electrode strength : No electrode detachment should be found when the device is pushed in two directions of X and Y with the force of 10.0N for 60 ± 2 seconds after soldering between copper plate and the electrodes.
(Refer to figure at right)



3-5. Vibration test : Inductance deviation is within $\pm 10.0\%$ after 1 hour sweeping vibration in each three directions, namely, forward and backward, up and down, right and left. The frequency is $10 \sim 55 \sim 10\text{Hz}$ and the amplitude of 1 minute cycle is 1.5mm PP.


3-6. Recommended reflow condition:

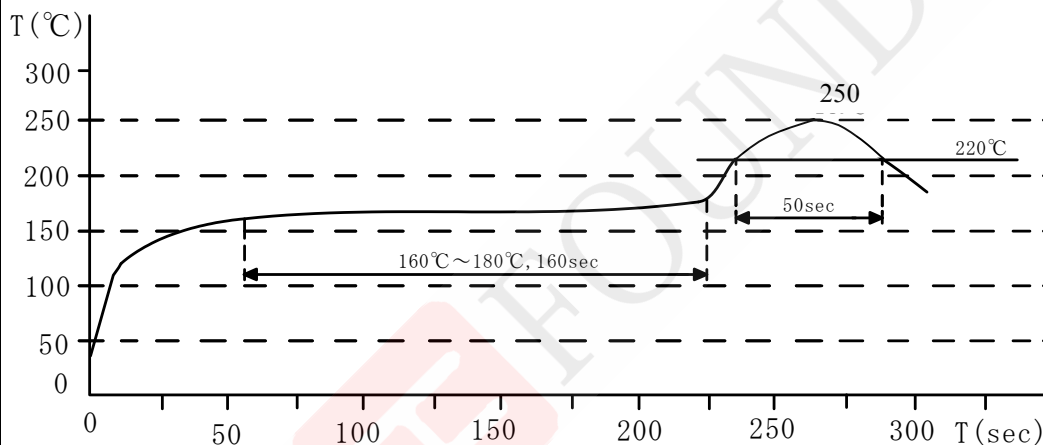

3-7. Humidity test : Inductance deviation is within $\pm 5.0\%$ after 96 ± 4 hours test under the condition of relative humidity of $90 \sim 95\%$ and temperature of $60 \pm 2^{\circ}\text{C}$, and 1 hour storage under room ambient conditions after the device is wiped with dry cloth.




4. Construction and materials

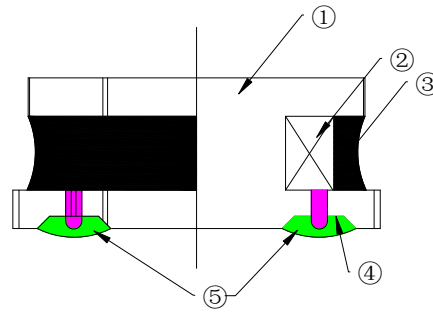


No.	Part name	Material	Ceaiya P/N
①	Drum Core	Ni-Zn Ferrite Core	TW
②	Wire	Polyurethane enameled copper wire	YLSL
③	Adhesive	Epoxy Resin Magnetic Powder	CH
④	Plating Electrodes	Plating: Ag 10-20 μm Ni 1-3 μm Sn 3-7 μm	
⑤	Outer Electrodes	Top surface solder coating Sn99%、 Ag0.3%、Cu0.7%	YX

5. Package Specification

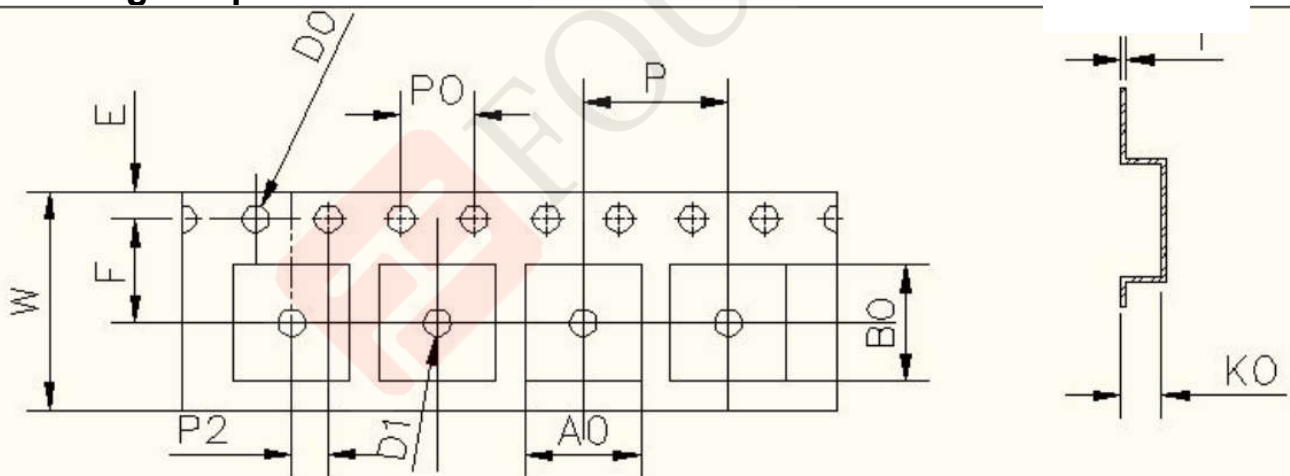


ITEM	W	A0	B0	K0	P	F	E	D0	D1	P0	P2	T
DIM	12.00	6.4	6.3	3.15	8.00	5.50	1.75	1.50	1.50	4.00	2.00	0.35
TOLE	± 0.3	± 0.1	± 0.1	± 0.1	± 0.1	± 0.15	± 0.1	+0.1	+0.1	± 0.1	± 0.1	± 0.05

6. CARRIER REEL DIMENSIONS:

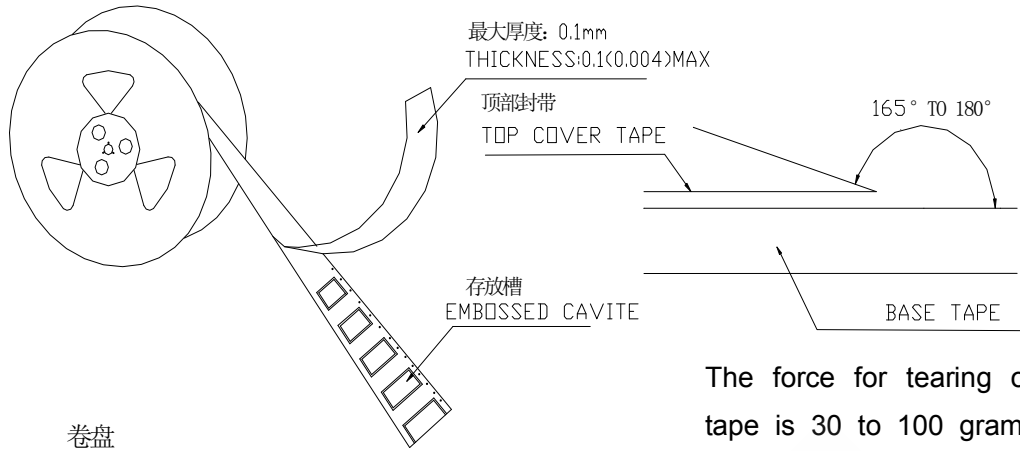


卷盘
Carrier Tape Reel



The force for tearing off cover tape is 30 to 100 grams in the arrow direction/按箭头的方向施加 30 克至 100 克力撕开

材质: 塑胶
MATERIAL: PLASTIC

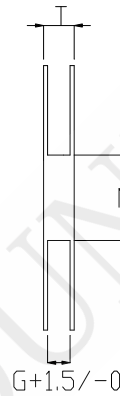


Unit: mm







Type	A	B	C	G	N	T
12mm	330	21±0.8	13±0.4	12.4	100	16.4


7. PACKAGE SPECIFICATION :

2KPCS/Reel 6KPCS/Inner Box 18KPCS/Outer Box

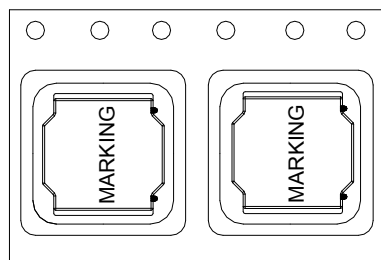

Visual Inspection Standard of Product

No.	Defect Item	Figure	Rejection Identification	Acceptance
1	Core Defect		The defect length(c or f)more than L/6 or W/6 , NG	AQL=0.65
2	Core Crack		Visual cracks , NG	AQL=0.65
3	Starvation		(1)Resin starved length a more than L/2, NG (2)When L>2mm,b>H/2, NG (3)When L≤2mm, b don't control	AQL=0.65
4	Excessive glue		The length, width or height of product beyond specified value, NG	AQL=0.65
5	Cold Solder		(1)For CR2520** Series , cold solder N>0.5mm,NG (2)For other series, cold solder N>1mm,NG	AQL=0.65
6	Marking Defect		The marking angle a>45° , NG	AQL=0.65



Δf: Clearance between terminal and the surface of plate must be 0.2mm max when coil is placed on a flat plate.